
5FT X 7.5FT LUMIÈRE LIGHT WALL®

PRODUCT CODE: LLW2X3





Graphic Endcaps (Optional)

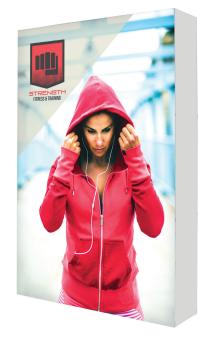

Channel Bars on Frame



Frame



Ladder Lights



On frame On graphic

LIFE

PRODUCT DESCRIPTION

1 YEAR

Illuminate your message with the Lumiere Light Wall®! Lumiere ladder lights make backlit graphics pop on this innovative combo display of silicone-edge graphics and portable RPL fabric pop ups. Plus, the Lumiere shrinks down in size: simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabrics graphics. Setup requires 1 person and 5-10 minutes. SEG portability is easy and stylish.

NDOOR

DOUBLE SIDED

SINGLE

IDED

person and 5-10 minutes. S	EG portability is easy and stylish.
DISPLAY DIMENSION	59.25" W x 88.75" H x 14.5" D
GRAPHIC DIMENSIONS	
MAIN GRAPHIC	60" W x 88.5" H
END CAP GRAPHIC	14.25" W x 89" H
GRAPHIC MATERIAL	
DYE-SUB BACKLIT FABRIC	
GRAPHIC FINISHING	
Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.	
DISPLAY CONSTRUCTION	
Aluminum Frame	
LADDER LIGHTS SPECIFICATION	
EACH LIGHT BEAD	1.0W
ANGLE	170°
OPERATING VOLTAGE	DC12V/24V
TOTAL WATTAGE	210W
TOTAL AMPERAGE	9A
MODULAR LED CURTAIN 30W KIT 1X2	
POWER (W): 62 LM/ (W): 110 LM/ (W): 6820	
TRANSFORMER SPECIFICATION	
OUTPUT	24V/3.75A
INPUT	AC100-240V/1.3A
SHIPPING WEIGHTS & DIMENSIONS	
Lumiere Ladder Lights - 2 Units	
Shipping Weight	16 lbs
Shipping Dimensions	13" L x 9.5" W x 36.25" H
Lumiere Light Wall	
Shipping Weight	20 lbs (frame only) 24 lbs (with graphics)
Shipping Dimensions	34" L x 14" W x 9" H
LARGE QUANTITY FREIGHT	
Lumiere Ladder Lights	
Freight Shipping	30 boxes per 48" L \times 40" W \times 28.5" H skids
Freight Weight	168 lbs
Lumiere Light Wall	
Freight Shipping	15 boxes per 48" L x 40" W x 48" H skids
Freight Weight	240 lbs (frame only) 288 lbs (with graphics)
GRAPHIC TURN AROUND TIME	
2 business days after proof approval	

2 business days after proof approval
AVAILABILITY CA and PA


Please Note: Lumiere Ladder Light[®] sets are placed on the front side of the frame only. They are not double-sided and may not be used as so.

AVAILABLE ACCESSORIES





Qty 1 - Pop Up Frame



Qty 4 - End Cap Channel Bars



Qty 4 - 2 Section Channel Bars




Qty 1 - Carry Bag



Qty 4 - 3 Section Channel Bars



Qty 1 - Channel Bar Bag



Qty 6 - Ladder Lights



Qty 2 - Transformers



Qty 2 - Transformer Power Cords



Qty 2 - Transformer Clips

Qty 2 - Ladder Light Travel Bags




SET UP INSTRUCTIONS 1/2

Set Up Pop Up Frame




a. Place frame with the adjustable feet facing down.



- **c.** Close frame by pushing the outside of the frame until male and female ends connect.

Insert Channel Bars



- **a.** Expand each channel bar. Follow bungee to connect.

b. Expand the frame.

b. Attach channel bars to frame.



c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom endcaps on each side of the frame.

Unfold The Hooks



a. Locate each hook.




b. Turn each hook outward.



c. Twist each hook to face the front of the ladder light.

SET UP INSTRUCTIONS 2/2

Hook Ladder Lights




a. Hang ladder lights from top "x" bar. *Note:* Make sure to follow label that says "UP" or "DOWN".



b. Hang ladder lights each section of the frame until reaching the bottom of the frame.

Install Transformer Clip



a. Snap Transformer Clip onto each bottom "x" bar.



b. While pulling the end tab of the clip, place the Transformer on top of the Transformer clip.

Connect Ladder Lights



a. Connect each ladder light together using the barrel connectors.



b. Connect bottom set of lights to the LED Driver using the barrel connectors



c. Insert power cord to the LED Driver. Plug other side into your main power outlet.

Install Graphic



a. In each corner, insert the silicone edge beading into the groove.



b. Then insert the remainder of the beading. Repeat blockout installation for the back frame.



c. Then repeat graphic installation on the end caps for each side.